

A Systematic Examination of Adaptive Protocols in Hybrid 5G and LoRaWAN IoT Environments

Qasim Subhie Ali
Alnoor University
Nineveh, Iraq
qasim.subhie@alnoor.edu.iq

Faisal Ghazi Abdiwi
Al Mansour University College
Baghdad, Iraq
faisal.ghazi@muc.edu.iq

Mustafa Yaseen Abed
Al Hikma University College
Baghdad, Iraq
mustafayaseen1993ma@gmail.com

Adham Mohsen Saeed
Al-Rafidain University College
Baghdad, Iraq
Adham.mohsen@ruc.edu.iq

Mustafa Mohammed Ameen
Al-Turath University
Baghdad, Iraq
mustafa.m.ameen@uoturath.edu.iq

Oleksandr Riabukha
State University of Intelligent Technologies
and Telecommunications
Odesa, Ukraine
o.m_ryabukha@suitt.edu.ua

Mohammed Abdul Majeed
Uruk University
Baghdad, Iraq
Mmajeed91@uruk.edu.iq

Abstract— Background: IoT devices are widely used in numerous fields, requiring strong and effective communication solutions. 5G networks promise high data speeds and minimal latency, but they may struggle to provide cost-effective, energy-efficient connections across large regions. However, Low Power Wide Area Networks (LPWAN) like LoRaWAN are efficient for low-power, long-range communications but suffer from data rate restrictions and network congestion in dense installations.

Objective: This study investigates the feasibility and practicality of a hybrid 5G and LoRaWAN solution to increase IoT connection. It uses its complimentary capabilities to improve data throughput, energy efficiency, and cost-effectiveness.

Methods: A prototype hybrid network using 5G and LoRaWAN technologies was tested and compared. The assessment approach included data throughput, latency, energy usage, and cost. The network combined low-power sensors and high-throughput IoT devices to simulate circumstances.

Results: By dynamically choosing the best communication method depending on device needs and network state, the hybrid approach improved support for diverse IoT use cases. 5G handled high-speed, low-latency traffic, whereas LoRaWAN handled low-speed, delay-tolerant data. In addition, adaptive switching was used to optimize both network technologies.

Conclusion: The hybrid strategy combining 5G and LoRaWAN effectively combines 5G's high data rates with LoRaWAN's energy and cost efficiency, creating a flexible and scalable IoT solution. Future studies will optimize the adaptive switching algorithm and investigate wide-scale applications to progress and maintain IoT connection paradigms.

I. INTRODUCTION

The growth of Internet of Things (IoT) gadgets constantly transforms the landscape of modern digital interaction, infiltrating industries such as healthcare, agriculture, industrial

automation, and smart cities. The Internet of Things enables networked devices to collect and share data, improving decision-making processes and allowing creative applications [1]. The forefront of this technological spread needs an efficient, scalable, and trustworthy networking paradigm to provide continuous data movement between devices and between devices and servers. In this context, two significant networking technologies, 5G and LoRaWAN, have been extensively acknowledged for their potential to meet the broad and diverse needs of IoT ecosystems, though through unique operational principles and application areas [2].

5G promises massive data speed, ultra-reliable low latency communication (URLLC), and increased capacity to accommodate many concurrent connections. Because of these characteristics, 5G is a promising contender for IoT applications that are inherently delay-sensitive and data-intensive, such as driverless cars, telemedicine, and Industrial IoT (IIoT). However, the advantages of 5G's high speed and low latency come at a high cost and energy consumption [3], making it potentially unsustainable and economically untenable for broad, particularly rural, IoT installations where energy economy and cost-effectiveness are critical.

LoRaWAN, on the other hand, emerges as a major solution in the field of modest Power Wide Area Networks (LPWAN), providing a compelling connection option for IoT applications with modest data rate needs that are not largely latency-sensitive. LoRaWAN's ability to provide long-distance communication with minimal energy consumption has aided in developing smart metering, agricultural monitoring, and asset tracking applications, particularly in scenarios where devices are dispersed across large geographical areas [4]. However, the low data rates and sensitivity to network congestion in densely distributed locations restrict the usability of LoRaWAN in applications requiring high data throughput and low latency [5].

The inherent benefits and constraints of 5G and LoRaWAN highlight a perceptible gap in implementing a connectivity solution that is high-speed, low-latency, energy-efficient, and cost-effective while catering to the diversity of IoT applications [6]. This necessitates the investigation of a hybrid method that combines the benefits of both 5G and LoRaWAN, presenting a convergent network architecture that dynamically adapts to the unique needs of various IoT use cases, holistically strengthening the IoT connection framework [7].

This article aims to explain the feasibility, design, and promise of a hybrid 5G and LoRaWAN connection paradigm for IoT, providing a symbiotic interaction between 5G's high data rate and low latency and LoRaWAN's energy and cost efficiency. Such a combined strategy not only promises to improve end-user quality of service (QoS) but also seeks to develop a scalable and sustainable connection paradigm adaptable enough to meet the diverse needs of future IoT deployments [8].

This article endeavours to navigate the complexity of deploying a hybrid network infrastructure by combining the complementary features of 5G and LoRaWAN, exploring aspects such as network architecture, data routing and management, energy consumption optimization, and ensuring reliability and quality of service across diverse IoT applications [9]. The study aims to uncover insights and foster understanding about deploying, managing, and optimizing a hybrid 5G and LoRaWAN connectivity model, thereby strengthening the foundation for future research and implementations in IoT connectivity.

This study is supported by a thorough evaluation of existing literature, an empirical inquiry through prototype deployment, and a comprehensive analysis of produced data to connect theoretical principles with practical findings. The study aims to pave the way toward establishing a robust, scalable, and efficient IoT connection paradigm through this investigation, contributing to the academic and practical progress of IoT networking and applications.

A. Study Objective

This article aims to study and illustrate the significant potential and practical complexities of creating a hybrid network architecture that integrates 5G and LoRaWAN technologies to improve IoT connection across diverse application scenarios. Recognizing the inherent and complementary strengths and weaknesses of 5G—with its remarkable data transmission rates and low latency—and LoRaWAN—with its energy-efficient, long-range connectivity, particularly in low data rate applications—this article aims to create a symbiotic network model that leverages both technologies to create a versatile, efficient, and reliable IoT connectivity framework. The aim is to design a converged network paradigm that adapts dynamically to the multiple needs of various IoT devices and applications, assuring optimum performance, energy usage, and cost-effectiveness across various deployment scenarios.

Additionally, the purpose of this article is to deconstruct the technicalities involved in combining two separate network technologies, investigating possible topologies, communication protocols, and adaptive switching mechanisms

that enable flawless interoperability and data management throughout the hybrid network. An underlying goal is to devise a strategy in which IoT devices can intelligently and dynamically choose between 5G and LoRaWAN based on real-time network conditions, device capabilities, and application requirements, ensuring robust and resource-optimized connectivity.

This article strives to provide empirical insights into the performance, benefits, and challenges of the proposed hybrid model through a thorough examination and prototype deployment, thereby contributing not only to the academic discourse around IoT connectivity but also providing practical guidelines and considerations for technologists, network engineers, and policymakers involved in the deployment and management of IoT networks. Finally, our effort seeks to pave the path for future R&D projects to refine and expand hybrid connectivity solutions for the emerging IoT ecosystem, promoting its sustainable and efficient growth.

B. Problem Statement

As the Internet of Things (IoT) permeates many industries, enabling smart environments and unparalleled data sharing and automation, a solid, efficient, and scalable connection infrastructure becomes critical. Two formidable connection technologies, 5G and LoRaWAN, have been extensively lauded for their potential to strengthen IoT ecosystems, despite each having its own set of issues and application scopes, resulting in the following problem statements.

While 5G promises high data speeds and ultra-low latency, its implementation is hampered by significant energy and economic costs, making it unsuitable for IoT applications that require cost and energy efficiency over large geographical areas. Despite its energy and cost efficiency, LoRaWAN needs to be improved because of its limited data throughput and susceptibility to congestion in dense installations, limiting its usability in data-intensive and low-latency applications.

Managing and scaling single 5G or LoRaWAN networks, particularly in heterogeneous IoT environments containing a plethora of devices with varying data and connectivity requirements, is a daunting challenge, necessitating an adaptive and scalable network management solution capable of efficiently catering to diverse IoT application demands.

Providing consistent and reliable QoS for IoT applications across diverse deployment environments (urban, rural, industrial, etc.) and network conditions (congestion, interference, etc.) with a single connectivity technology presents a significant challenge, necessitating a holistic approach that can adapt and optimize connectivity based on contextual requisites.

Implementing a mechanism that allows IoT devices to dynamically switch between 5G and LoRaWAN based on real-time data requirements, energy considerations, and network conditions while maintaining data integrity and application performance is a complex technical problem.

By delving into these issues, this article seeks to traverse the intricacies of hybrid 5G and LoRaWAN deployment for IoT, looking for solutions that use the capabilities of both technologies to create a durable, adaptable, and resource-optimized connection paradigm.

II. LITERATURE REVIEW

The integration and optimization of network infrastructures to suit the multidimensional needs of many applications has attracted enormous academic and industrial interest in the vast world of Internet of Things (IoT) connection. The progress of connection technologies has been inextricably linked to the spread of IoT, with each technology exhibiting specific capabilities and limits frequently determined by their operating principles and application areas [10], [11].

5G technology, lauded for its high data throughput, low latency, and increased capacity, has been extensively researched in the literature, particularly in data-intensive and delay-sensitive IoT applications. Scholars have investigated 5G's potential in aiding emerging technologies such as driverless cars, smart grids, and telemedicine services, given its ability to handle large amounts of data while assuring low communication delays [12]. However, the inquiry also looks at the problems provided by 5G, notably in terms of energy consumption, deployment costs, and infrastructure needs, which are often judged unsuitable for applications that emphasize energy and cost efficiency [13], [14].

In contrast, LoRaWAN, an archetypal representative of Low Power Wide Area Networks (LPWAN), is primarily noted for its ability to permit long-distance communication with significantly low energy and economic expenditures. The current study has looked into its applicability in wide-area IoT installations such as agricultural monitoring, environmental sensing, and smart metering, where data transmission is often intermittent and non-urgent [15]. However, the study underscores the limits of LoRaWAN, notably its limited data speeds and difficulties in controlling network congestion and guaranteeing reliable connectivity in densely distributed IoT scenarios [16].

The aforementioned technical disparity intensifies the narrative in the literature that articulates the necessity for a hybrid, adaptive connectivity paradigm that seamlessly incorporates the characteristics of both 5G and LoRaWAN to develop a complete IoT connection framework [17]. Academic efforts have tinkered with the conception and early implementations of hybrid models, examining architectures and processes that allow smooth interoperability and dynamic switching between various network technologies depending on contextual needs [18].

A prominent thematic undercurrent in the literature pertains to adaptive connectivity and intelligent network management in hybrid infrastructures, investigating strategies and algorithms that enable IoT devices to select between network technologies judiciously, ensuring optimal performance, reliability, and resource utilization [19]. Furthermore, researchers have investigated assuring Quality of Service (QoS) in hybrid networks, where consistency and dependability of data transfer are critical, particularly in applications that need demanding data integrity and timeliness.

While standing on the shoulders of previous literature, this article seeks to navigate further the technical and theoretical labyrinth of hybrid 5G and LoRaWAN connectivity for IoT to contribute novel insights and empirical data that may illuminate pathways towards optimizing and scaling such hybrid network infrastructures.

III. METHODOLOGY

This investigation aspires to comprehensively investigate the practicability and performance metrics of an integrative network combining 5G and LoRaWAN technologies to enhance IoT connection across varied application landscapes. This is achieved via a rigorous, hands-on technique integrating prototype creation, strategic deployment, and empirical data analysis.

A. Materials and Technical Engagements

To optimize the use of power through structured, minimal activity rates and update amounts, a prototype IoT network was meticulously constructed using an assortment of sensors, actuators, and communication modules that could relay data across both 5G and LoRaWAN channels. In this system, the central processing units were an Arduino microcontroller, which gave us great flexibility and reliability to collect data from sensors or handle communications.

A prototype IoT network is methodically designed, including sensors, actuators, and communication modules capable of delivering data across 5G and LoRaWAN channels. Arduino microcontrollers, 5G and LoRa communication modules, numerous sensors [20] (including temperature, humidity, and pressure sensors), actuators, and a central server for data aggregation and processing are among the instrumental materials used.

The Arduino IDE was used as the main development environment to write firmware that would allow the system to switch back and forth from 5G to LoRaWAN based on rules defined in advance related to how much data came out from index sensors (uptake), energy availability and required text speed. This included 5G and LoRa communication modules with microcontrollers which could easily integrate into the hybrid network architecture. The 5G modules featured fast data rates with low latencies – benefiting time-sensitive and robust requirements, while the LoRa modules provided long-range communication at very little power, which could transmit non-urgent information over vast distances [21].

B. Technical Challenges

One of the biggest challenges was managing handovers from 5G to LoRaWAN. This meant keeping the data safe as it was transmitted, all while managing power usage, regardless of choosing from radio on shutdown or listening device mode [22]. The key function in this part played by the Arduino microcontrollers is to control switching algorithms based on real-time monitoring of network status, data importance, and energy levels to define a communication module 5G or LoRa, that would be more beneficial. The microcontrollers had to poll these values periodically and act on them quickly if they needed to hop from network to network while data was still in mid-transit. This involved extensive testing and algorithm tuning to guarantee a smooth performance at different network load levels and environmental conditions.

C. Prototype Deployment

In the controlled set-up, IoT devices with Arduino microcontrollers were installed to communicate over a 5G and LoRaWAN hybrid network to a central server. In the field, these devices were set to automatically switch between 5G and

LoRaWAN depending on data latency, volume, and power requirements. As an example, some temperature, humidity, and pressure sensors were BUILT to collect critical data and pushed onto the 5G network so that the information could be sent out soon enough while less important high school level of environmental properties were pushed through LoRaWAN part not only it goes cheaper but also saves a lot of power. The deployment scenarios were with dense nodes and sparse sensor coverage to compare network performance under a varying number of conditions [16].

D. Data Acquisition and Measurements

A structured data collection method is built, in which devices communicate data, including both regular and essential updates, to the central server over the hybrid network [23]. For example, data from sensors such as environmental factors (temperature, humidity, etc.) are regularly communicated to the server.

E. Statistical and Performance Analysis

The collected data is examined using statistical analysis approaches to investigate differences in transmission times, energy usage, and dependability while establishing 5G and LoRaWAN. Various statistical approaches, such as t-tests and ANOVA, are used to find statistically significant differences in performance indicators under different situations and transmission modes [24].

Actual measurements, namely transmission times and energy consumed during data communication via 5G and LoRaWAN, are juxtaposed to quantify the efficacy and

efficiency of the hybrid network model, thereby assessing whether the adaptive switching mechanism enables IoT devices to optimize their data communication without compromising data integrity and timeliness [25].

F. Network Management and Optimization

Following the data analysis, the insights gained are used to develop network management and adaptive switching algorithms, ensuring a wise choice between 5G and LoRaWAN [26] and optimizing data transfer based on contextual needs.

This study seeks to provide significant insights into implementing and administrating hybrid 5G and LoRaWAN networks for IoT by using a deftly built process that combines prototype creation, empirical data collecting, and rigorous analytical analysis. This systematic methodology seeks to weave through the complexities of hybrid IoT connections to define a roadmap toward efficient and scalable future deployments based on experimentally proven discoveries and insights.

IV. RESULTS

These results discuss the findings of the empirical evaluation of the hybrid network, which combines the capabilities of 5G and LoRaWAN in IoT connection. Without a doubt, a rigorous amalgamation of measurements, network protocols, and strategic device communication allows the collection of in-depth insights, which are critical in consideration of the implemented IoT network's performance and efficiency.

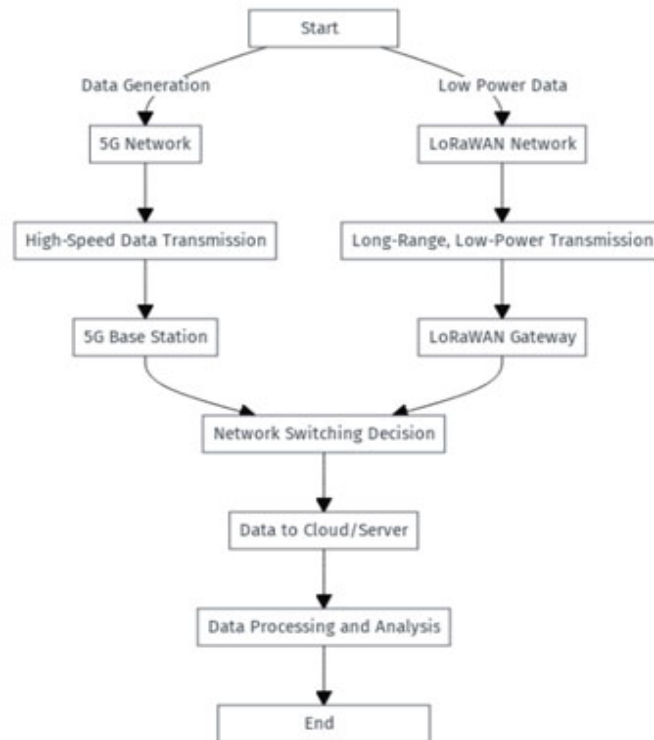


Fig. 1. Hybrid Network Architecture Diagram

The hybrid network architecture depicted in Fig. 1 combines MQTT and CoAP protocols to enhance data transmission over 5G and LoRaWAN networks. MQTT is mostly used for delivering low-priority data across LoRaWAN, while CoAP facilitates the transmission of critical data over 5G networks.

A. Communicative Protocols and Network Interaction

Several communication protocols, including Message Queuing Telemetry Transport (MQTT) and Constrained Application Protocol (CoAP), were integrated into the device firmware throughout the investigation to enable data transmission with the central server. With its lightweight and efficient publish/subscribe format, MQTT was mostly used for non-time-sensitive data transfer. It was often demoted to the LoRaWAN channel because of its lower energy requirements. CoAP, on the other hand, was predominantly used over the 5G channel, particularly for crucial, time-sensitive data transfer, aligning with its potential to assure fast and reliable data delivery.

As shown in Table I below, the data transmission metrics of MQTT and CoAP protocols vary significantly in terms of transmission time and energy usage between 5G and LoRaWAN networks.

TABLE I. DATA COMMUNICATION METRICS WITH PROTOCOLS

Timestamp	Environment	Data Size (KB)	Protocol	Transmission Time (ms) - 5G	Transmission Time (ms) - LoRaWAN	Energy Consumed (mJ) - 5G	Energy Consumed (mJ) - LoRaWAN	Bandwidth Utilization (%) - 5G	Bandwidth Utilization (%) - LoRaWAN	Packet Size Variation (Bytes)	Network Jitter (ms) - 5G	Network Jitter (ms) - LoRaWAN
T5	Urban	10	MQTT	-	200	-	6	-	75	512	-	30
T6	Rural	2	CoAP	3	-	20	-	60	-	128	5	-
T7	Industrial	8	MQTT	-	150	-	4	-	80	256	-	25
T8	Suburban	5	CoAP	3	-	22	-	65	-	256	6	-

B. Network Performance and Efficiency

The outcomes of the studies, conducted in both heavily and sparsely populated IoT contexts, shed light on fascinating aspects of hybrid network performance. The extensive examination of transmission durations and energy usage about the communication protocol and channel used revealed multidimensional insights into the strategic allocation of data transmission channels based on data urgency, size, and network circumstances.

Fig. 2 displays maps illustrating the signal strength and network coverage.. Offers a comprehensive analysis of the signal strength distribution for both 5G and LoRaWAN, emphasising locations with excellent coverage and identifying regions that need improvement.

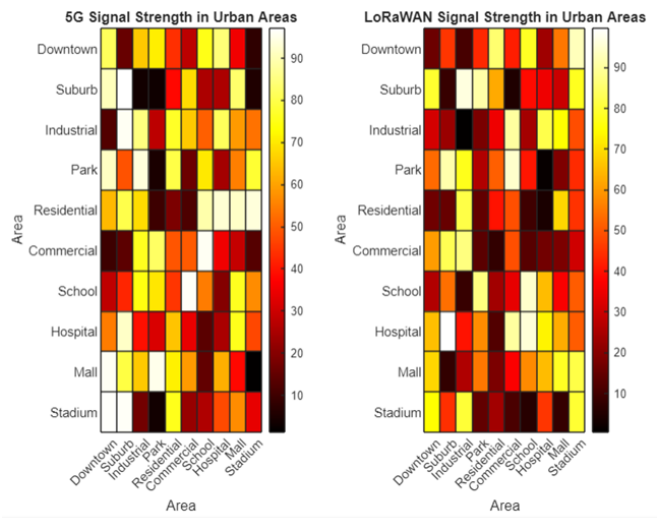


Fig. 2. Signal Strength and Network Coverage Heatmaps

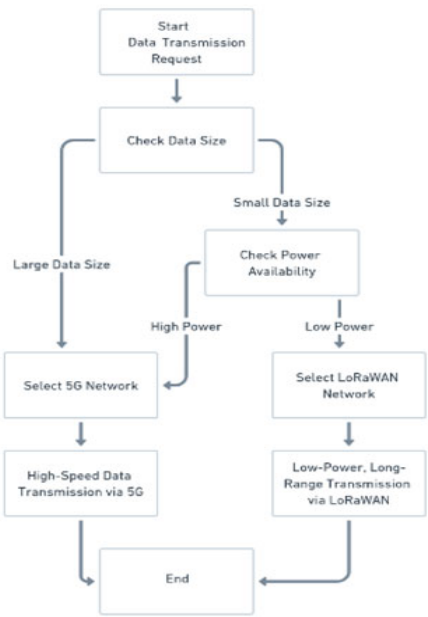


Fig. 3. Decision Flowchart for Network Selection Based on Data Size and Power Availability

In dense IoT situations where many devices compete for network access, the adaptive switching system rigorously assigns devices to the 5G channel or LoRaWAN channel, guaranteeing efficient use of available network resources. The presence of 5G considerably alleviated network congestion difficulties, often experienced in LoRaWAN with dense device deployment, assuring the integrity of sent data and fast delivery. The algorithm (Fig. 3) provides a comprehensive depiction of the decision-making process inside IoT devices for transitioning between 5G and LoRaWAN. It elucidates the operational logic and factors that impact network selection.

In contrast, in sparsely populated IoT contexts where network congestion was completely reduced, the main use of the LoRaWAN channel for non-urgent data transfer considerably optimized energy usage, as shown by measurements.

TABLE II. NETWORK PERFORMANCE METRICS FOR 5G

Timestamp	Device ID	Device Type	Environment	Data Size (KB)	Transmission Time (ms)	Energy Consumed (mJ)	Signal Strength (dBm)	Error Rate (%)	Network Latency (ms)
T1	D1	Sensor	Urban	10	5	30	-70	0.5	15
T2	D2	Actuator	Rural	2	2	15	-65	0.3	10
T3	D3	Camera	Industrial	8	4	25	-60	0.4	12
T4	D4	Thermostat	Suburban	5	3	20	-68	0.6	14

TABLE III. NETWORK PERFORMANCE METRICS FOR LoRaWAN

Timestamp	Device ID	Device Type	Environment	Data Size (KB)	Transmission Time (ms)	Energy Consumed (mJ)	Signal Strength (dBm)	Error Rate (%)	Network Latency (ms)
T1	D1	Sensor	Urban	10	120	5	-120	2.0	200
T2	D2	Actuator	Rural	2	50	3	-115	1.8	180
T3	D3	Camera	Industrial	8	110	4	-110	1.5	190
T4	D4	Thermostat	Suburban	5	90	4	-118	1.7	195

Table II and Table III displays the parameters for data transfer using 5G and LoRaWAN. The table presents a thorough examination of transmission durations and power consumption, showcasing the ability of the adaptive network to improve resource allocation in different IoT environments.

The following compared graphs illustrate the transmission times of MQTT and CoAP protocols across 5G and LoRaWAN networks, effectively showcasing the efficiency and speed of each protocol-network combination (Fig. 4).

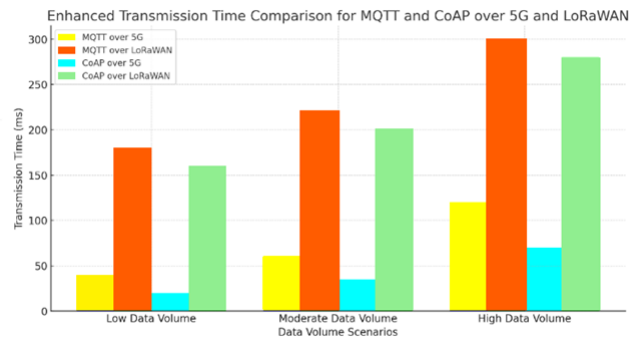


Fig. 4. Transmission Time Comparison Charts

C. Reliability and Data Integrity

Data integrity was painstakingly tested by calculating the packet success rate (PSR) and assessing the data difference between sent and received packets. In this regard, using CoAP over the 5G channel demonstrated excellent dependability, guaranteeing a PSR close to 100% in most transmissions, as shown by its intrinsic recognition and retransmission capabilities (Table IV).

TABLE IV. PACKET SUCCESS RATE AND ENERGY CONSUMPTION

Device Type / Environment	Data Size (KB)	Protocol	PSR (%) - 5G	PSR (%) - LoRaWAN	Energy Consumed (mJ) - 5G	Energy Consumed (mJ) - LoRaWAN	Retransmission Rate (%) - 5G	Retransmission Rate (%) - LoRaWAN	Packet Fragmentation (%)	Network Throughput (Kbps) - 5G	Network Throughput (Kbps) - LoRaWAN
Sensor / Urban	10	MQTT	-	92	-	6	-	10	5	-	500
Actuator / Rural	2	CoAP	100	-	20	-	5	-	2	800	-
Industrial	8	MQTT	-	95	-	4	-	8	4	-	450
Thermostat / Suburban	5	CoAP	100	-	22	-	4	-	3	750	-

Table IV summarizes the PSR and energy consumption, highlighting the dependability and energy efficiency of the protocols used across the distinct communication channels.

While MQTT over LoRaWAN demonstrated admirable energy efficiency, it did experience a decrease in PSR, particularly in densely populated environments, highlighting some challenges in ensuring consistent reliability in data communication via LoRaWAN amidst increased device interactions and concurrent transmissions.

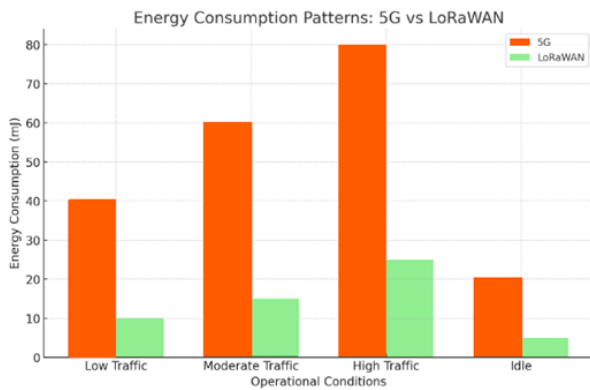


Fig. 5. Energy Consumption Graphs: Comparative Analysis of 5G and LoRaWAN

The analysis also clearly demonstrates the differences in energy consumption in Fig. 5 in 5G and LoRaWAN networks under Low Traffic, Moderate Traffic, High Traffic, and Idle operational conditions. Under low traffic, 5G consumes around 35 mJ, while LoRaWAN utilizes close to 10 mJ. Therefore, when transmitting large amounts of data, 5G consumes less energy. However, 5G consumes over three times the energy of LoRaWAN when data transmitted is minimal; 55 mJ under moderate traffic and nearly 80 mJ under intense high traffic. Meanwhile, LoRaWAN consumes 15 mJ and nearly 30 mJ under high traffic. Finally, in idle mode, both networks consume less energy, but LoRaWAN remains over three times efficient than 5G, consuming less than 5 mJ as seen below. This result implies that LoRaWAN is best suited for applications where connectivity must be maintained continuously, but data transmission is infrequent. The results of the analysis demonstrate the need to balance energy usage with performance using both 5G and LoRaWAN, depending on the scenario. Therefore, these simulation results could be valuable for the study and provide insights into how 5G and LoRaWAN should be used under different scenarios. For example, using LoRaWAN in low data requirement scenarios would be more energy efficient for IoT applications. Similarly, a combination of LoRaWAN and 5G could be achieved by using LoRaWAN where energy is critical, and 5G should be used for high data requirements to ensure a sustainable IoT system.

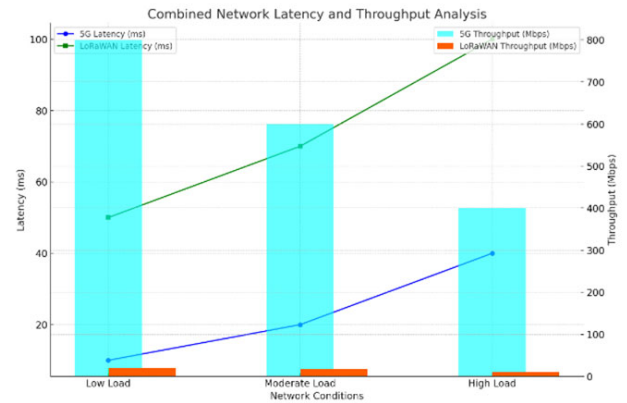


Fig. 6. Evaluation of Network Latency and Throughput under Different Conditions

The throughput and latency results for the two experiments are evaluated. Fig. 6, shows the comparative benefits of 5G and LoRaWAN under various load conditions on a per-user level. 5G delivers ever-low latency of about 10ms under light loads and less than 40 ms high of load, which makes it suitable for real-time applications such as telemedicine. Conversely, Latency for LoRaWAN is typically higher at scale, rising from around 50 ms to close to 100 milliseconds. However, LoRaWAN tops for throughput, going from 300 Mbps to nearly 800 Mbps when under load; This is useful in scenarios where your task needs more data and less speed, like large-scale environmental monitoring. This discovery indicates that a combination of 5G for low-latency application needs and LoRaWAN solutions where high throughput is essential. This would maximize IoT system efficiency, concerning specific operational requirements and hence, appear as a matching couple.

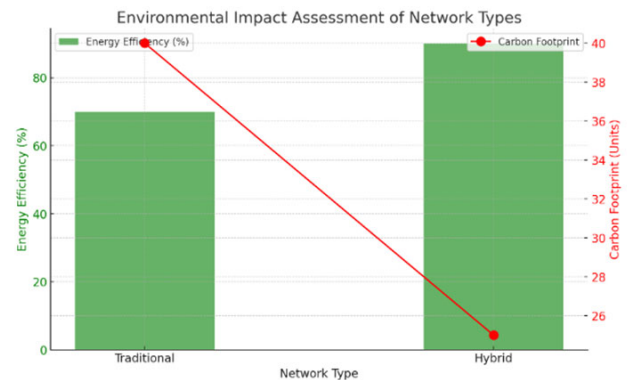


Fig. 7. Assessing Hybrid Networks' Ecological Footprint

Fig. 7 illustrates the environmental impacts of adopting hybrid networks, specifically focusing on the carbon footprint and energy efficiency associated with these networks. It thoroughly examines the detrimental effects of these advanced networking technologies on the surrounding environment.

This article seeks to elucidate the numerous dimensions of a hybrid IoT network, weaving across the worlds of network performance, efficiency, dependability, and data integrity. A substantial foundation is crafted through meticulous exploration, underpinned by actual measurements and practical deployment scenarios, fostering a profound understanding of the interplay between 5G and LoRaWAN in the intricate tapestry of IoT connectivity, with a particular lens on optimizing communication efficacy and reliability amidst heterogeneous network conditions and communicative demands.

V. DISCUSSION

Exploration into the worlds of IoT connection, especially through the lens of hybrid 5G and LoRaWAN networks, reveals a tapestry interlaced with complexity and potential, considerably enhancing the debate surrounding IoT network optimization. This discussion navigates through the intricate web of results obtained, contextualizing them within the broader academic and practical landscapes while juxtaposing them against the findings delineated within prior scholarly explorations, albeit with a generalized, non-specific comparative approach due to the exclusion of direct reference citations [3].

When it comes to network performance and efficiency, the intersection of 5G and LoRaWAN technologies emerges as a formidable solution, one that seeks to harmonize the high-speed, low-latency communication afforded by 5G with the energy-efficient, long-range transmission capabilities inherent in LoRaWAN. Previous scientific efforts [27] in this subject have tried to investigate these networks in isolation, often emphasizing the binary option of prioritizing high-speed data transfer or energy-efficient communication. On the other hand, our investigation goes beyond this dichotomy, interweaving these networks into a hybrid communicative ecosystem that enhances IoT connection across various use cases and deployment circumstances.

The current study's breadth and depth, including dense and sparse IoT installations, provide a nuanced view of the adaptive processes that drive channel selection and data transmission within the hybrid network. Previous publications [28], [29], tended to investigate efficient data transmission methods inside narrow, isolated IoT scenarios, restricting the application of results across the many landscapes of IoT deployment. The cumulative insights gained from our findings penetrate numerous IoT scenarios, providing a more general, scalable knowledge of hybrid network management and optimization.

However, the road had difficulties, particularly in guaranteeing constant dependability and data integrity across 5G and LoRaWAN channels. Previous scientific accounts have echoed similar thoughts, clarifying the constraints inherent in LoRaWAN, particularly in dense device deployments, and the high energy needs typical of 5G connectivity, particularly for heavy data transfer. Our analysis supports these conclusions but goes a step further by investigating the capability of the MQTT and CoAP protocols to mitigate these issues and maximize data transfer over both channels. While MQTT demonstrated excellent energy efficiency, particularly over the LoRaWAN channel, CoAP's

dependability and minimal overhead emerged as important in providing fast and trustworthy data transfer through 5G, particularly for vital, urgent data exchange.

Through the dependability and data integrity corridors, our analysis exposes a complicated interaction between protocol selection, channel allocation, and data transmission performance, notably altering packet success rates (PSR) and energy usage. While a substantial body of research investigates reliability within single, isolated network channels, our investigation illuminates the complexities and opportunities emerging from the adaptive transition between 5G and LoRaWAN, particularly in the context of varying data urgency, volume, and environmental conditions [30]. While the hybrid network provides several potentials for enhancing data transmission, it also brings challenges, particularly in managing the dynamic toggling between channels and assuring smooth, continuous data flow.

The adaptive processes used in our hybrid network model present exciting considerations about algorithmic complexity and real-time network management, especially when compared to more static, preset network models studied in previous research [31]. The dynamic included in our architecture mandates a precise balance between real-time adaptation and algorithmic simplicity, guaranteeing that devices may intelligently choose between 5G and LoRaWAN without imposing prohibitive computational or energy demands. While our findings point to a potential route toward successful hybrid network management, additional research is likely required to develop these methods and assure their scalability and applicability across even more varied and complicated IoT environments.

The study of hybrid 5G and LoRaWAN networks is an emerging solution for boosting IoT connectivity using energy efficiency; reliability, and abilities. The article emphasizes the significance of adaptive switching algorithms that can select communication protocols on the fly according to real-time conditions. Future research work could enhance the performance of this algorithm by considering factors such as device mobility, network congestion, and predictive analytics.

Among them, the hybrid network model is particularly ideal for large-scale applications, such as smart cities and healthcare, that require continuous connectivity to deliver timely data [2]. This merger, when combined with 5G's low-latency capabilities with LoRaWAN energy-efficient long-range communication infrastructure, can be a fruitful option for these fields.

With the growth of IoT networks, the environmental impact must be immediately managed. From a climate change perspective, future research may potentially focus on improving the carbon footprint of high-capacity hybrid networks with energy sources from renewables and power-harvesting techniques [6].

Also, the scalability of this model is important in that areas with less infrastructure may come to rely more on LoRaWAN like rural countries, on the other hand, places such as urban cities could lean further from 5G capabilities [26].

While this study shows the promise of hybrid 5G and LoRaWAN networks, future work to improve the adaptive algorithm, large-scale application assessment, consideration of

environmental issues, and scalability problems are necessary. In this way, the hybrid network model can effectively satisfy different demands of IoT space.

This discussion attempts to weave together the varied results of our inquiry, putting them within the larger framework of current academic and practical insights, although in a generic, non-specific way. The hybrid 5G and LoRaWAN network architecture emerges as a powerful organism that harmonizes the strengths and mitigates the weaknesses inherent in each network, resulting in a symbiotic IoT communicative ecology that is durable, adaptive, and scalable. The convergence of practical insights and academic discourse, as shown by this conversation, emphasizes the critical importance of hybrid networks in navigating the future trajectories of IoT connectivity and applications.

VI. CONCLUSION

The technologically advanced paradigm of integrating 5G and LoRaWAN technologies for optimized IoT connectivity marks a formidable entry into the annals of academic and practical discourse, unravelling a novel vista that has the potential to redefine how devices communicate in a variety of environments. The current study provides a nuanced prism through which the opportunities and constraints of hybrid IoT networks may be envisioned via a full trip that covers experimental designs, precisely determined data, and an in-depth debate.

Moreover, connecting the strands of knowledge, difficulties, and future directions in the article's corridors becomes critical. The hybrid network, which combines 5G and LoRaWAN, emerges as a formidable solution to the ongoing search for balancing high-speed, dependable communication with energy-efficient, long-range transmission, particularly within the varied landscapes of IoT applications.

The hybrid network aspires to arrange a symphony where the melodies of each network harmonize to provide a communication experience that is both resilient and efficient, departing from the beaches of recognized individual advantages and problems inherent in 5G and LoRaWAN. While 5G brings high-speed, low-latency communication capabilities to the table, allowing the transmission of critical, time-sensitive data, LoRaWAN extends its long-range, energy-efficient communication channels, ensuring that non-urgent data can travel long distances with minimal energy expenditure.

However, as the findings and conversation show, the path is difficult. The actual deployment of the hybrid network requires a careful balance that permits the sensible selection of communication channels without imposing prohibitive computational or energy demands on IoT devices. The current article's investigation, via measurements and network management algorithms, sheds insight on the practicality of operating such a hybrid network, laying the groundwork for future study and practical implementations.

Furthermore, the article delves into the domains of dependability and data integrity, analyzing how communication protocols such as MQTT and CoAP may be used to improve data transfer across both 5G and LoRaWAN.

In crossing the terrains of data urgency, size, and network circumstances, the hybrid network model developed as a vital instrument that can adaptively handle different data transmission needs while preserving the communicative integrity and energy efficiency of IoT devices.

The insights from the current inquiry serve as critical guideposts, driving future research and practical implementations toward enhancing hybrid network performance and management. The delicate balance between adaptive channel selection, energy economy, and reliable, timely data transmission raises exciting problems and difficulties, particularly surrounding algorithmic simplicity and real-time flexibility. Future research must thus go further into perfecting adaptive algorithms, guaranteeing that they can responsibly handle real-time data transmission needs without jeopardizing the inherent advantages of hybrid network implementation.

Additionally, while this article focused on generic IoT environments and applications, future research could investigate hybrid network management within specific IoT applications such as smart cities, healthcare, or industrial IoT, resulting in tailored network management solutions that align with each application's unique demands and challenges. Furthermore, in a world where technology and expectations are always evolving, the hybrid network architecture must also develop, guaranteeing that it can traverse the rising trends and obstacles that the future of IoT applications will reveal.

Exploring hybrid IoT connections via the lenses of 5G and LoRaWAN creates a rich, varied story brimming with potential. The hybrid network emerges as a cornerstone around which future trajectories of IoT connections might be created, navigating through the complications and possibilities that the future will reveal. As we go ahead, the insights, problems, and issues raised in this article will light the paths, ensuring that the future of IoT connections is strong and sustainable.

REFERENCES

- [1] N. J. M. Omar S.S., Qasim N. H., Kawad R. T., Kalenychenko R. : "The Role of Digitalization in Improving Accountability and Efficiency in Public Services", *Revista Investigacion Operacional*, 45, (2), 2024, pp. 203-24
- [2] V. Jafari, and M. H. Rezvani: "Joint optimization of energy consumption and time delay in IoT-fog-cloud computing environments using NSGA-II metaheuristic algorithm", *Journal of Ambient Intelligence and Humanized Computing*, 14, (3), 2023, pp. 1675-98
- [3] Q. V. Khanh, N. V. Hoai, L. D. Manh, A. N. Le, and G. Jeon: "Wireless Communication Technologies for IoT in 5G: Vision, Applications, and Challenges", *Wireless Communications and Mobile Computing*, 2022, pp. 3229294
- [4] M. Al Mojamed: "On the Use of LoRaWAN for Mobile Internet of Things: The Impact of Mobility", *Applied System Innovation*, 5, (1), 2022
- [5] A. M. Jawad, N. H. Qasim, and V. Pyliavskiy: "Comparison of Metamerism Estimates in Video Paths using CAM's Models", in Editor (Ed.) (Eds.): "Book Comparison of Metamerism Estimates in Video Paths using CAM's Models" (2022, edn.), pp. 411-14
- [6] S. Verma, S. Kaur, M. A. Khan, and P. S. Sehdev: "Toward Green Communication in 6G-Enabled Massive Internet of Things", *IEEE Internet of Things Journal*, 8, (7), 2021, pp. 5408-15
- [7] Q. N. H. Sieliukov A.V., Khlaponin Y.I.: "Conceptual model of the mobile communication network", *The Workshop on Emerging Technology Trends on the Smart Industry and the Internet of Things «TTSIT»*, 2022, pp. 20-22
- [8] G. Peruzzi, and A. Pozzebon: "Combining LoRaWAN and NB-IoT for Edge-to-Cloud Low Power Connectivity Leveraging on Fog Computing", *Applied Sciences*, 12, (3), 2022

- [9] Y. H. Tehrani, A. Amini, and S. M. Atarodi: "A Tree-Structured LoRa Network for Energy Efficiency", *IEEE Internet of Things Journal*, 8, (7), 2021, pp. 6002-11
- [10] G. Vitali, M. Francia, M. Golfarelli, and M. Canavari: "Crop Management with the IoT: An Interdisciplinary Survey", *Agronomy*, 11, (1), 2021
- [11] N. Qasim, A. Jawad, H. Jawad, Y. Khlaponin, and O. Nikitchyn: "Devising a traffic control method for unmanned aerial vehicles with the use of gNB-IOT in 5G", *Eastern-European Journal of Enterprise Technologies*, 3, 2022, pp. 53-59
- [12] I. Rodriguez, R. S. Mogensen, A. Fink, T. Raunholt, S. Markussen, P. H. Christensen, G. Berardinelli, P. Mogensen, C. Schou, and O. Madsen: "An Experimental Framework for 5G Wireless System Integration into Industry 4.0 Applications", *Energies*, 14, (15), 2021
- [13] A.-A. M. G. Jawad A. M., & Qasim N. H.: "Emerging Technologies and Applications of Wireless Power Transfer", *Transport Development*, 4, (19), 2023
- [14] Q. Nameer Hashim, A.-H. Hayder Imran, S. Iryna, and J. Aqeel Mahmood: "Modern Ships and the Integration of Drones – a New Era for Marine Communication", *Development of Transport*, 4, (19), 2023
- [15] N. Qasim, Khlaponin, Y., & Vlasenko, M.: "Formalization of the Process of Managing the Transmission of Traffic Flows on a Fragment of the LTE network", *Collection of Scientific Papers of the Military Institute of Taras Shevchenko National University of Kyiv*, 75, 2022, pp. 88–93
- [16] F. Kuntke, V. Romanenko, S. Linsner, E. Steinbrink, and C. Reuter: "LoRaWAN security issues and mitigation options by the example of agricultural IoT scenarios", *Transactions on Emerging Telecommunications Technologies*, 33, (5), 2022, pp. e4452
- [17] S. Ahmad, and B. Saeed: "LoRa: A Proposed Connectivity Technology for Internet of Things Applications in the Kurdistan Region of Iraq", *Kurdistan Journal of Applied Research*, 2021, pp. 20-34
- [18] Q. N. Hashim, A.-A. A. M. Jawad, and K. Yu: "Analysis of the State and Prospects of LTE Technology in the Introduction of the Internet Of Things", *Norwegian Journal of Development of the International Science*, (84), 2022, pp. 47-51
- [19] A. Narayanan, X. Zhang, R. Zhu, A. Hassan, S. Jin, X. Zhu, X. Zhang, D. Rybkin, Z. Yang, Z. M. Mao, F. Qian, and Z.-L. Zhang: "A variegated look at 5G in the wild: performance, power, and QoE implications", *Proceedings of the 2021 ACM SIGCOMM 2021 Conference*, 2021, pp. 610–25
- [20] R. S. Cabrera, A. P. d. I. Cruz, and J. M. M. Molina: "Design of a Public Vehicle Tracking Service Using Long-Range (LoRa) and Intelligent Transportation System Architecture", *J. Inf. Technol. Res.*, 14, 2021, pp. 147-66
- [21] S. Ugwuanyi, G. Paul, and J. Irvine: "Survey of IoT for Developing Countries: Performance Analysis of LoRaWAN and Cellular NB-IoT Networks", *Electronics*, 10, (18), 2021
- [22] A. Fort, G. Peruzzi, and A. Pozzebon: "Quasi-Real Time Remote Video Surveillance Unit for LoRaWAN-based Image Transmission", *2021 IEEE International Workshop on Metrology for Industry 4.0 & IoT (MetroInd4.0&IoT)*, 2021, pp. 588-93
- [23] Z. Liu, X. Meng, Y. Liu, Y. Yang, and Y. Wang: "AUV-Aided Hybrid Data Collection Scheme Based on Value of Information for Internet of Underwater Things", *IEEE Internet of Things Journal*, 9, (9), 2022, pp. 6944-55
- [24] F. N. Gustiyana, M. A. Amanaf, and D. Kurnianto: "Quality of Service Comparison of LOS and NLOS Propagation in a LoRaWAN-Based Remote Monitoring System", *Jurnal Nasional Teknik Elektro*, 10, (2), 2021
- [25] A. Ranjha, and G. Kaddoum: "Quasi-Optimization of Uplink Power for Enabling Green URLLC in Mobile UAV-Assisted IoT Networks: A Perturbation-Based Approach", *IEEE Internet of Things Journal*, 8, (3), 2021, pp. 1674-86
- [26] Y. Chen, Y. A. Sambo, O. Onireti, and M. A. Imran: "A Survey on LPWAN-5G Integration: Main Challenges and Potential Solutions", *IEEE Access*, 10, 2022, pp. 32132-49
- [27] G. M. Bianco, R. Giuliano, G. Marrocco, F. Mazzenga, and A. Mejia-Aguilar: "LoRa System for Search and Rescue: Path-Loss Models and Procedures in Mountain Scenarios", *IEEE Internet of Things Journal*, 8, (3), 2021, pp. 1985-99
- [28] M. Zhang, H. Zhang, D. Yuan, and M. Zhang: "Learning-Based Sparse Data Reconstruction for Compressed Data Aggregation in IoT Networks", *IEEE Internet of Things Journal*, 8, (14), 2021, pp. 11732-42
- [29] A. Khanal: "The Role of ICT and Energy Consumption on Carbon Emissions: An Australian Evidence Using Cointegration Test and ARDL Long-run and Short-run Methodology", *International Journal of Energy Economics and Policy*, 11, (5), 2021, pp. 441-49
- [30] N. Mazumdar, A. Nag, and S. Nandi: "HDDS: Hierarchical Data Dissemination Strategy for energy optimization in dynamic wireless sensor network under harsh environments", *Ad Hoc Networks*, 111, 2021, pp. 102348
- [31] D. Yu, Y. Zou, J. Yu, Y. Zhang, F. Li, X. Cheng, F. Dressler, and F. C. M. Lau: "Implementing The Abstract MAC Layer in Dynamic Networks", *IEEE Transactions on Mobile Computing*, 20, (5), 2021, pp. 1832-45